

IR Bullet Kameralar



SOLIDRON SLD-C48 - 700TVL, IR BULLET KAMERA, SWDR, OSD, DNR



SLD-C48

700 TVL, 0,001 Lux
SWDR, OSD, DNR

DWDR (Digital Wide Dynamic Range)

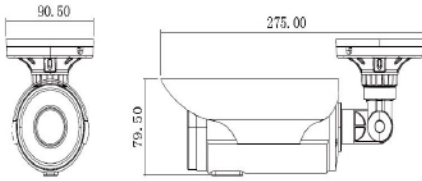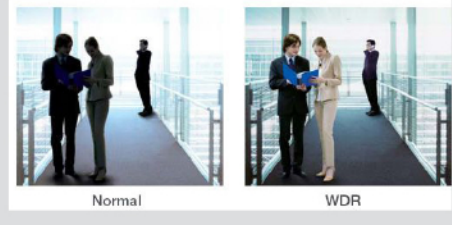

SLD-C48- 700TVL, SWDR, OSD, DNR

- 1/3" SONY Super HAD CCD II
- 700 TVL Çözünürlük
- 2.8-12mm Manual Zoon Lens
- 0,001 Lux Işık Hassasiyeti
- 24 Adet IR Led
- 40M Görüş mesafesi
- Digital Noise Reduction (DNR)
- SWDR (Super Wide Dynamic Range)
- OSD (On Screen Display) Menü



20 m



Model	SLD-C48
Görüntü Sensörü	1/3" SONY Super HAD CCD II
Horizontal Çözünürlük	700TVL, SWDR, OSD, 3 DNR, Demist, SLR
Piksel	976(Y) x 494(D)
TV Sistem	PAL/NTSC
IR LED	C 5x24 PCS
IR Görüş Mesafesi	40M
Lens	2.8-12mm Manual Zoom Lens/F2.0
Senkronizasyon	Dahili
Işık Hassasiyeti	0.001Lux/F2.0
S/N Oranı	Max 52dB (AGC Kapalı)
Gama Doğrulama	0.45
Video Çıkışı	Kompozit Video Çıkışı (1.0Vp-p, 75Ohm)
Tarama Sistemi	PAL:625 Lines, 50 Field/s; NTSC:525 Lines, 60 Field/s
Poz Süresi	Otomatik :PAL 1/50-1/100, 000s ;NTSC 1/60-1/100, 000s
Çalışma Isısı	-10°C ~ +50°C RH95% Max
Beyaz Dengesi (WB)	Otomatik
Güç Tüketimi	DC12V 300mA
Boyutlar	275(G) x 91(Y) x 80(D)mm
Ağırlık	1400g



renkli



yüksek çözünürlük



zoom



otomatik-iris