

IR Bullet Kameralar

SOLIDRON SLD-C24 - 650TVL, IR BULLET KAMERA, DWDR, OSD, DNR.

SLD-C24- 650TVL, DWDR, OSD, DNR.



- 1/3" SONY Super HAD CCD II
- 650 TVL Çözünürlük
- 3.6mm Lens
- 0,001 Lux Işık Hassasiyeti
- 24 Adet IR Led
- 20M Görüş mesafesi
- Digital Noise Reduction (DNR)
- DWDR (Digital Wide Dynamic Range)
- OSD (On Screen Display) Menü


20 m




SLD-C24

650 TVL, 0,001 Lux
DWDR, OSD, DNR

DWDR (Digital Wide Dynamic Range)

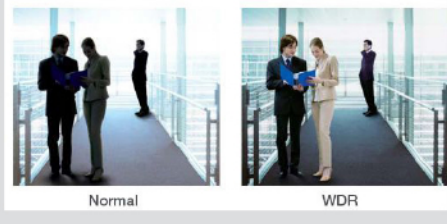

Model	SLD-C24
Görüntü Sensörü	1/3"SONY Super HAD CCD II
Horizontal Çözünürlük	650TVL,DWDR, OSD, DNR
Piksel	NTSC:768(Y)x494(D), PAL:752(Y)x582(D)
TV Sistem	PAL/NTSC
IR LED	C 5x24 PCS
IR Görüş Mesafesi	20M
Lens	Board Lens 3.6mm/F2.0
Senkronizasyon	Dahili
Işık Hassasiyeti	0.001Lux/F2.0
S/N Oranı	Max 52dB (AGC Kapalı)
Gama Doğrulama	0.45
Video Çıkışı	Kompozit Video Çıkışı (1.0Vp-p, 75Ohm)
Tarama Sistemi	PAL:625 Lines, 50 Field/s;NTSC:525 Lines, 60 Field/s
Poz Süresi	Otomatik :PAL 1/50-1/100, 000s ;NTSC 1/60-1/100, 000s
Çalışma Isısı	-10°C~ +50°C RH95% Max
Beyaz Dengesi (WB)	Otomatik
Güç Tüketimi	DC12V 300mA
Boyutlar	168(G) x 73.5(Y) x 65(D)mm
Ağırlık	830g



renkli yüksek çözünürlük zoom otomatik-iris